
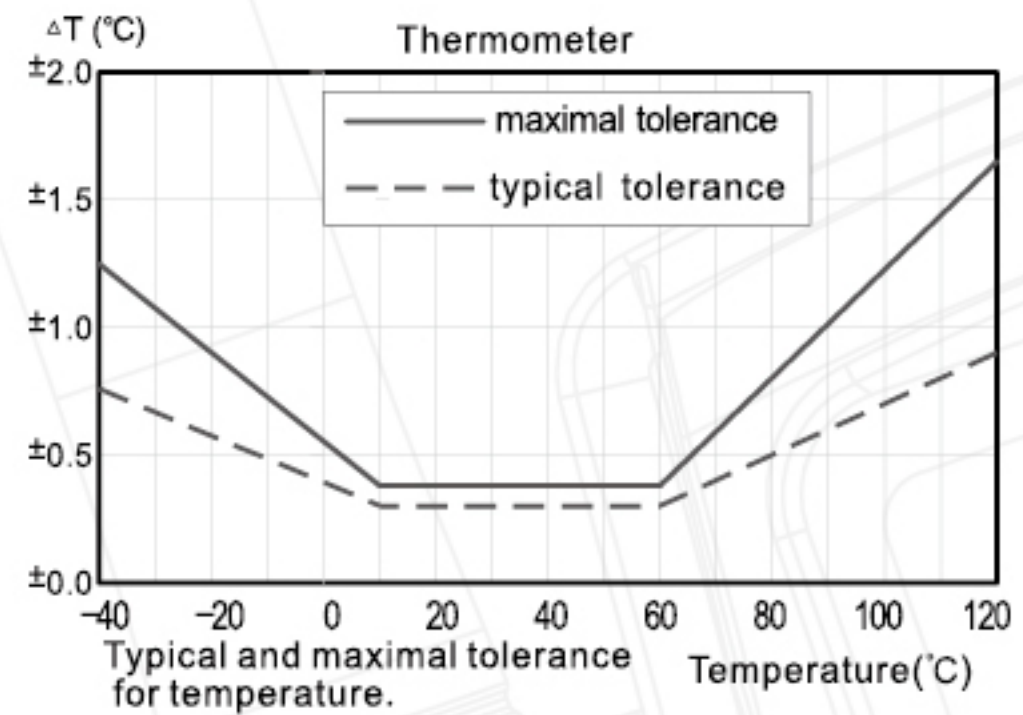


| Specification | | |
|-----------------------------------------------------------|----------------------------|----------|
| Items | Temperature | Humidity |
| Measuring range | -30~80°C | 0~100%RH |
| Memory size | 32256 | |
| Power | 1/2AA 3.6V Lithium Battery | |
| Size | 126*28*22mm | |
| Weisht | 49g | |
| Accessories: Cover, Braclet, Screw*2, CD, Lithium Battery | | |

| Specification | | | | | |
|-----------------|-----------|-----|---------|-----|-------|
| Parameter | Condition | Min | Typical | Max | Units |
| Accuracy | -30~80°C | | ±0.3 | | °C |
| Tolerance | | | | | °C |
| Repeatability | Max | | | | °C |
| Response Time | τ63% | 5 | | 30 | S |
| Operating Range | extended | -40 | | 125 | °C |
| Long Term Drift | | | <0.04 | | °C/yr |


LCD display

- 1.Blue tooth
- 2.Temperature reading
- 3.Temperature unit
- 4.Upper limit overflow
- 5.Lower limit overflow
- 6.Max value
- 7.Min value
- 8.Battery volume
- 9.Humidity reading
- 10.Humidity unit

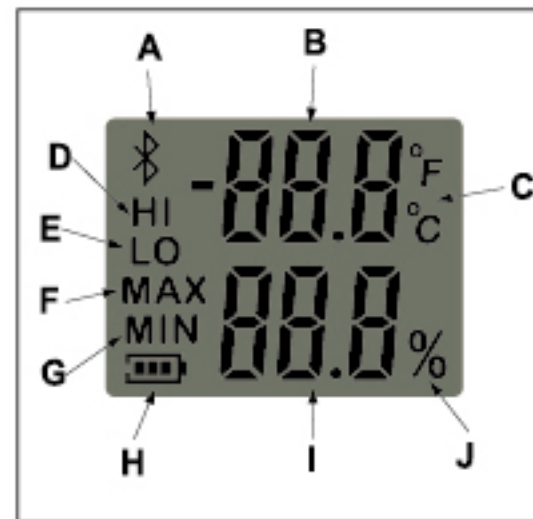


Structure of the device

- 1.Overflow alarm LED
- 2.Key
- 3.LCD
- 4.Position for battery replacement
- 5.USB interface
- 6.Waterproof rubber ring
- 7.Transparent waterproof cover
- 8.Bracket

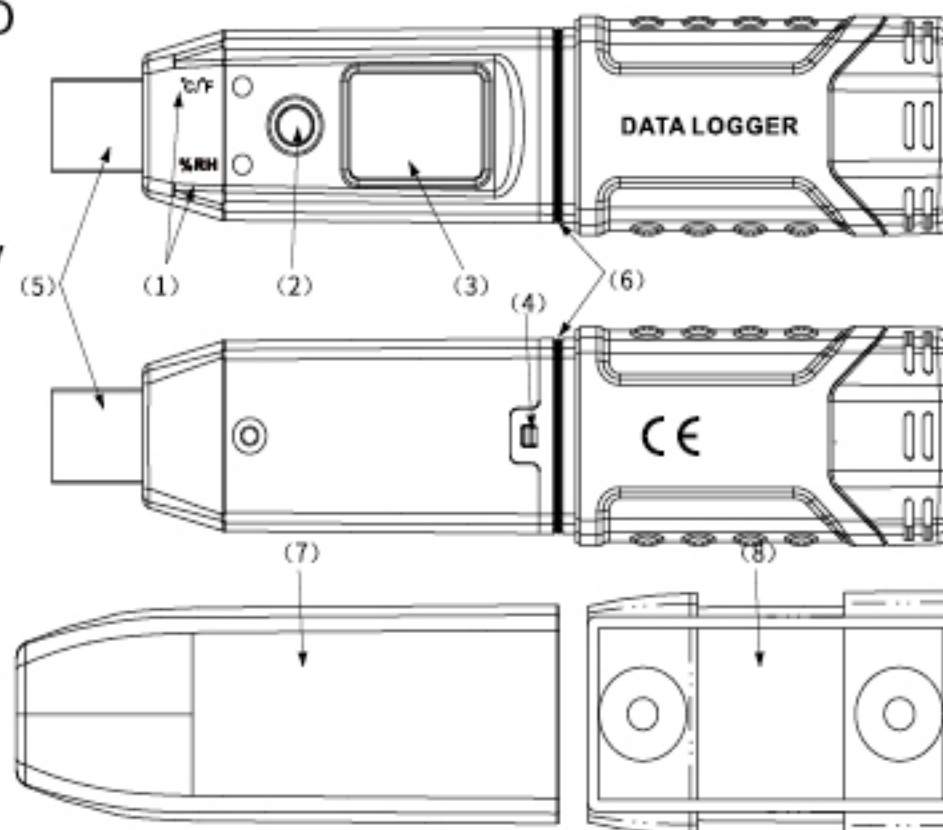

| Specification | | | | | |
|-----------------|-----------|-----|---------|-----|--------|
| Parameter | Condition | Min | Typical | Max | Units |
| Accuracy | typical | | ±2 | | %RH |
| Tolerance | Max | | | | %RH |
| Repeatability | | | ±0.1 | | %RH |
| Repeatability | | | ±1 | | %RH |
| Repeatability | | | <0.1 | | %RH |
| Response Time | τ63% | | 8 | | S |
| Operating Range | extended | 0 | | 100 | %RH |
| Long Term Drift | normal | | <0.5 | | %RH/yr |

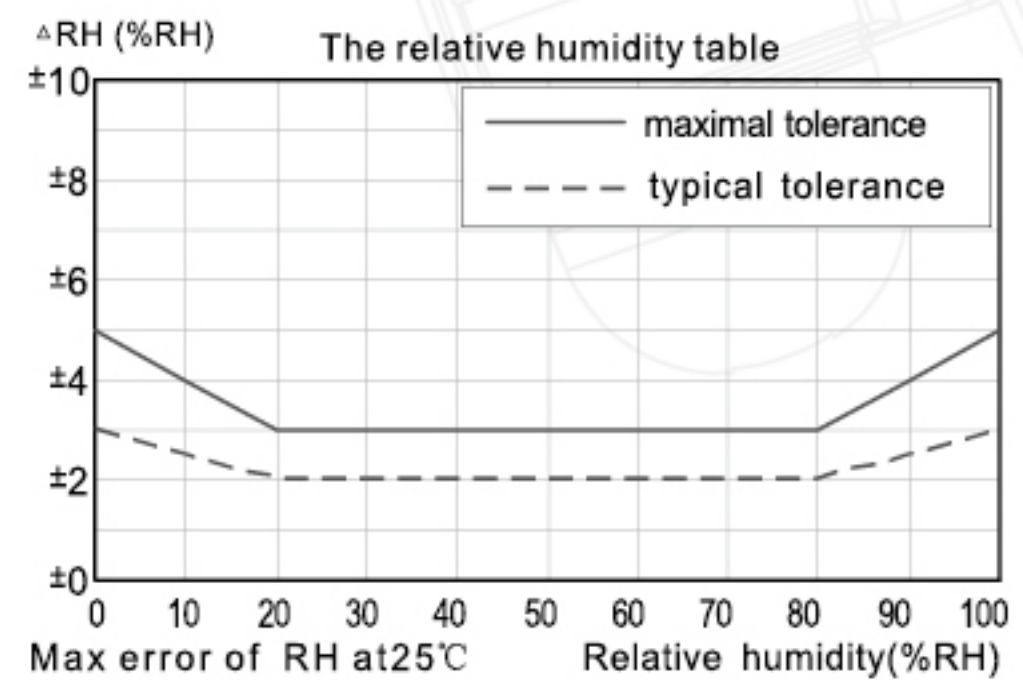

LINE ID: @neonics



ติดต่อบริษัท เนอเนอิกส์ จำกัด
Tel: 02-077-7602 หรือ 061-8268939
E-mail: sale@tools.in.th หรือ sale@neonics.co.th

