


Infrared Thermometer

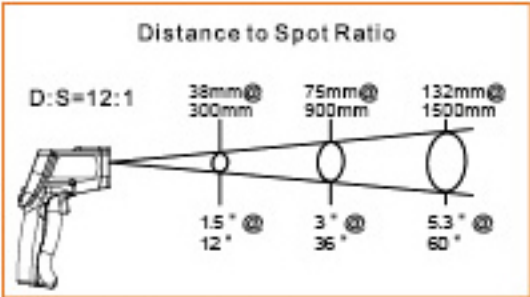

GM500/GM700/GM900

| Technical indicators       | GM500                      | GM700                      | GM900                      |
|----------------------------|----------------------------|----------------------------|----------------------------|
| Measuring range            | -50~550°C<br>(-58~1022°F ) | -50~750°C<br>(-58~1382°F ) | -50~950°C<br>(-58~1742°F ) |
| Precision                  | ±1.5%or±1.5°C              | ±1.5%or±1.5°C              | ±1.5%or±1.5°C              |
| Repetitive                 | 1% or ±1°C                 | 1% or 1°C                  | 1% or 1°C                  |
| Distance Spot Ratio        | 12:1                       | 12:1                       | 12:1                       |
| Emissivity                 | 0.1~1.0<br>Ajustable       | 0.1~1.0<br>Ajustable       | 0.1~1.0<br>Ajustable       |
| Repeatability              | 0.1°C/0.1°F                | 0.1°C/0.1°F                | 0.1°C/0.1°F                |
| Response Time              | 500ms                      | 500ms                      | 500ms                      |
| Wavelength                 | 8-14μm                     | 8-14μm                     | 8-14μm                     |
| Peculiarity                |                            |                            |                            |
| MAX/MIN/AVG/Yi-Xi          | √                          | √                          | √                          |
| °C/°F Selection            | √                          | √                          | √                          |
| Keep data display          | √                          | √                          | √                          |
| Locate laser on/off        | √                          | √                          | √                          |
| Backlight ON/OFF           | √                          | √                          | √                          |
| High/low temperature alarm | √                          | √                          | √                          |
| Auto power-off             | √                          | √                          | √                          |
| Conventional               |                            |                            |                            |
| Power supply               | 9V batteries               |                            |                            |
| Product size               | 172*50*111mm               |                            |                            |
| Product weight             | 220g (+batteries)          |                            |                            |

⚠ CAUTION LASER RADIATION. DO NOT STARE INTO BEAM. CLASS II LASER PRODUCT.

LINE ID: @neonics



ติดต่อบริษัท เนโอนิคส์ จำกัด  
Tel: 098-479-5684 หรือ 061-8268939  
E-mail: sale@tools.in.th เว็บไซต์ www.tools.in.th

