


Infrared Thermometer



GM500/GM700/GM900

Technical indicators	GM500	GM700	GM900
Measuring range	-50~550°C (-58~1022°F)	-50~750°C (-58~1382°F)	-50~950°C (-58~1742°F)
Precision	±1.5%or±1.5°C	±1.5%or±1.5°C	±1.5%or±1.5°C
Repetitive	1% or ±1°C	1% or 1°C	1% or 1°C
Distance Spot Ratio	12:1	12:1	12:1
Emissivity	0.1~1.0 Adjustable	0.1~1.0 Adjustable	0.1~1.0 Adjustable
Repeatability	0.1°C/0.1°F	0.1°C/0.1°F	0.1°C/0.1°F
Response Time	500ms	500ms	500ms
Wavelength	8-14µm	8-14µm	8-14µm
Peculiarity			
MAX/MIN/AVG/Yi-Xi	√	√	√
°C/°F Selection	√	√	√
Keep data display	√	√	√
Locate laser on/off	√	√	√
Backlight ON/OFF	√	√	√
High/low temperature alarm	√	√	√
Auto power-off	√	√	√
Conventional			
Power supply	9V batteries		
Product size	172*50*111mm		
Product weight	220g (+batteries)		

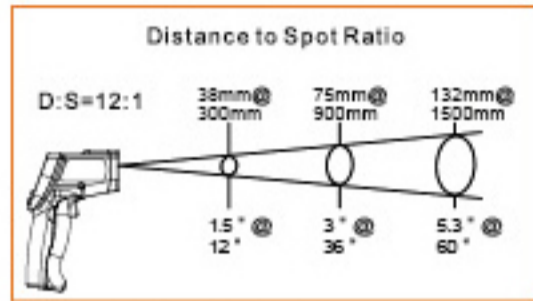

GM500



GM700



GM900

CAUTION LASER RADIATION. DO NOT STARE INTO BEAM. CLASS II LASER PRODUCT.

LINE ID: @neonics



ติดต่อบริษัท นีโอนิคส์ จำกัด

Tel: 098-479-5684 หรือ 061-8268939

E-mail: sale@tools.in.th เว็บไซต์ www.tools.in.th